MODEL

15AG - 20A
15AGS - 20AS
15AA - 20AA
15AAH - 20AAH

15 and 20 pound capacity

Heavy Duty

M·J·M

VEGETABLE PEELING MACHINE

Office
FEB 18 1959
Design Division

Potato and Vegetable PEELERS

- *Self-Sharpening* Carborundum *Abrasive*
- *Two year guarantee (parts and labor)*
- *Thick abrasive on side wall and disc*
- *Non-Corrosive metal construction*
- *Removable cast aluminum disc*
- *Powered by General Electric*
- *Lifetime Timken Bearings*
- *Silent "V" Belt Drive*
- *Peel traps included*
- *Easily cleaned*

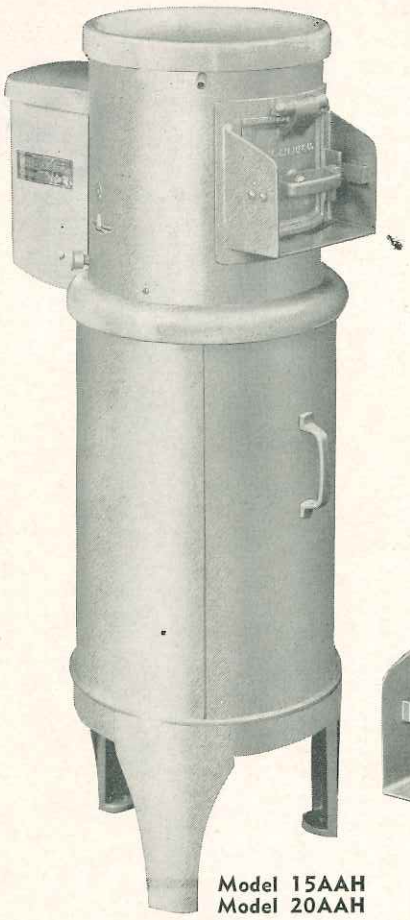

Model 15AAH
Model 20AAH

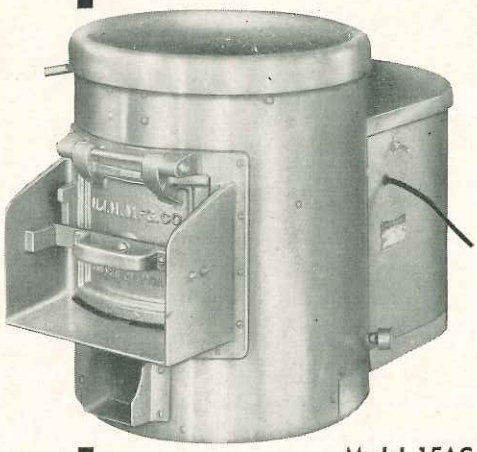

Model 15AG
Model 20A

LISTED UNDER REEXAMINATION SERVICE UL UNDERWRITERS' LABORATORIES, INC. OF ®

CSA

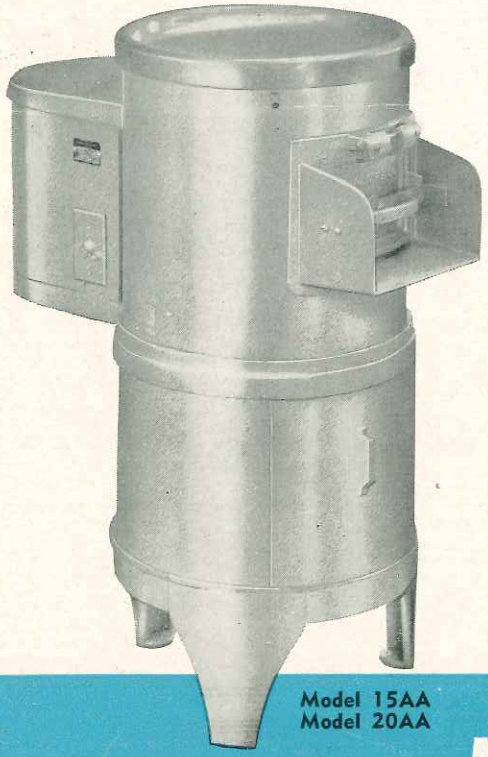

Model 15AA
Model 20AA

M.J.M. Heavy Duty Peelers will reduce your peeling cost in labor, vegetables, and time throughout its long life. A capacity load of hard root vegetables or potatoes peel in approximately 1 minute. M.J.M. exclusive design, coupled with extra thick self-sharpening **Carborundum** abrasives on sides and disc of the peeler chamber, has created a peeling machine unequalled for efficiency and long life. M.J.M. Peelers are heavy duty machines built to give years of trouble-free service.

RETURN TO
DESIGN DIV.

Two Year Guarantee (parts and labor)
Meets rigid requirements for sanitation
Built to last—Designed for lasting efficiency

America's Finest Vegetable Peeler!
Ask Your Dealer -- He Knows

M.J.M. Manufacturing Company

Heavy Duty Vegetable Peelers from 15 to 50 Pounds Capacity

M. J. M. Vegetable and POTATO PEELER

MODELS

15AG	20A
15AGS	20AS
15AA	20AA
15AAH	20AAH

G-11

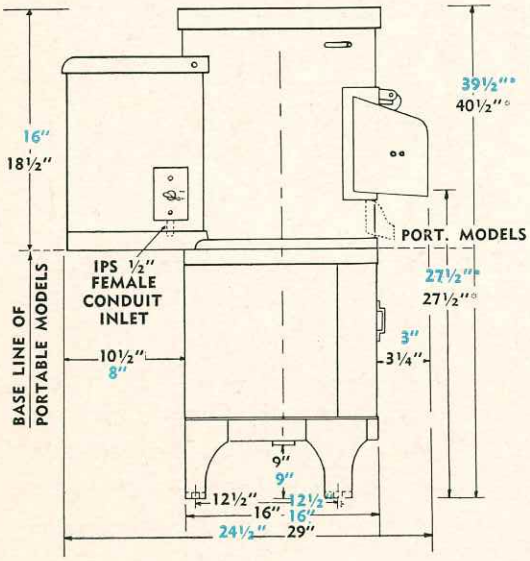

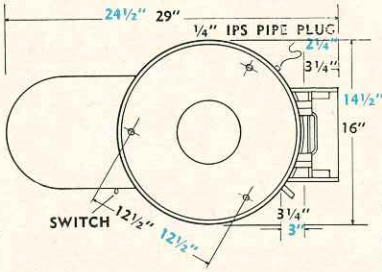

*Indicates measurements increased by 10" for AAH Models.

MODELS 15AGS & 20AS are the same as portable Models except mounted on 16" square steel utility stand, with loading height of 35¼" and vegetable discharge height of 22".

Blue type indicates measurements of 15 lb. capacity machine.

Black type indicates measurements of 20 lb. capacity machine.

Note: "AAH" type peelers available with long legs and short stand body when so ordered. Dimensions from drain outlet in stand to floor is increased by 10 inches.

INSTALLATION INSTRUCTIONS

Models 15AG, 20A Portable

Set machine on drainboard so that it will discharge into sink. Plug in 8 foot electric cord and attach ½" water inlet hose to standard cold water faucet. Water can be made to enter either side of peeler by interchanging inlet pipe and ¼" pipe plug. Hang peel basket on waste trough.

RETURN TO DESIGN DIV.

Models 15AGS, 15AA, 15AAH, 20AS, 20AA, 20AAH

1. Bolt stand securely to floor.
2. Drain waste water outlet in stand to floor sink or sewer. Water outlet is the 2" standard female pipe fitting on the center line of stand.
3. Connect ½" water inlet hose to standard cold water faucet. Water can be made to enter either right or left side of peeler by interchanging inlet pipe and ¼" pipe plug.
4. Connect electric motor or switch to source of power, first making sure that voltage, cycle and phase agree with specifications on motor plate.

Models 15AG, 20A—Portable
Models 15AGS, 20AS—Square steel utility stand
Models 15AA, 20AA—Low discharge, non-corrosive metal construction
Models 15AAH, 20AAH—Sink height discharge, non-corrosive metal construction

SPECIFICATIONS

Capacity—15 or 20 pounds of hard root vegetable peeled in approximately one minute.

Construction—Modern design . . . strength without weight. Built entirely of non-corrosive metals (except "AS" utility stand).

Abrasive—Exclusive self-sharpening **Carborundum** abrasive compound on walls and disc for greater efficiency. (⅜" minimum thickness)

Disc—Cast aluminum (won't rust). Lifts out for ease of cleaning. Abrasive minimum ⅜" thick. Special roll on disc insures perfect agitation and no "flats".

Peeling Chamber—Non-corrosive metal inside and out (won't rust). Minimum of ⅜" thick abrasive on peeling disc and sides.

Drive — Silent "V" Belt — lifetime Timken Bearings—requires less power.

Water Inlet—½" heavy duty flexible hose which may be used to clean peeler. Overhead "gooseneck" type furnished where required.

Water Outlet—See drawing for location of 2" female pipe outlet on all models except portable models which discharge waste water into sink.

Peel Basket—Furnished with all models. ⅛" perforated metal electrolytically zinc plated after fabrication.

Motor—General Electric's latest type "form G". ¼ HP on 15 pound capacity peelers and ⅓ HP on 20 pound capacity. Standard motors are for 115V, 60 cycle, single phase current and include overload protection. Motors with other current characteristics available on order.

Switch—Approved tumbler type opening all leads, mounted in motor cover. Eight foot rubber covered cord furnished with portable Models. Stand models equipped with fitting in base of switch for ½" conduit.

Note: **Direction of vegetable discharge can be adapted at factory to your specifications.**

When so ordered M.J.M. Peelers are furnished in accordance with Type III of Federal Specifications 00-M-00106a, 18 March 1953 or with Type III Federal Specification 00-V-185 dated Nov. 2, 1955.

M. J. M. Manufacturing Co. CULVER CITY, CALIFORNIA

Form No. 612 Printed in U.S.A.